ARMATURE PER SEGNALAZIONE OSTACOLI SERIE "LP" e " EV-50"
SIGNALLING OBSTACLES LIGHTING FIXTURES SERIES "LP" AND "EV-50"

MODO DI PROTEZIONE - *PROTECTION MODE*:
II 2GD Ex d IIC T3/T6 Ex tD A21 IP65 T200°C/85°C (Amb.temperature -20°C to +40°)

CERTIFICATO - CERTIFICATE: ATEX

Le armature illuminanti di questa serie sono particolarmente indicate per segnalazione ostacoli su torri, fabbricati, ecc., quale segnalazione per aerei
Sono dotate di diffusore colorato rosso con lenti di Fresnel.
La serie LP è fornita di lampada ad incandescenza, la serie EV-50 con lampada tipo flash.

VERNICIATURA: esterna epossidica RAL 7000

The ligthing fixtures of this series are particularly suitable for signalling obstacles or for mounting on towers, factories, etc.,as a signal for air navigation.
They are provided of red coloured diffuser with Fresnel lens.
THe lighting fixtures series "LP" are equipped with incandescent lamp, the series "EV-50" with flashing lamp.

PAINTING: *External epoxy RAL 7000*

CODICE - *CODE*	Potenza Massima - *Max power*	Voltaggio - *Voltage*
LP 50	100 W	12 ÷ 240 V
LP 100	2 x 100 W	12 ÷ 240 V
EV-50	4,5 W / 6 joule	12 ÷ 240 V

EV - 50
MINIFLASH

LP 50


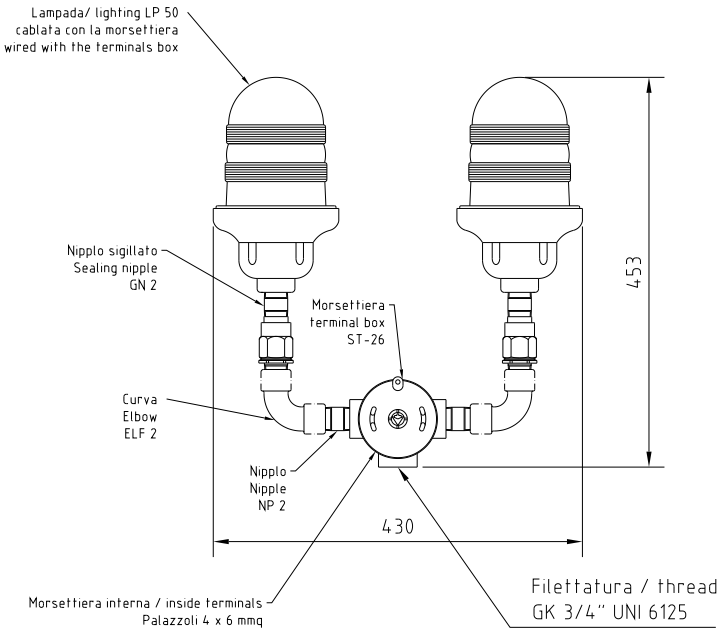
LP 100