# PRESE DI CORRENTE SERIE "FSCQ" - *RECEPTACLES SERIES "FSCQ"*

MODO DI PROTEZIONE - *PROTECTION MODE*:
II 2GD Ex d IIC T6/66 (Ambient temperature -20°C/-60°C to +40°C)

CERTIFICATO - *CERTIFICATE:* ATEX, IECEx, EAC

Prese antideflagranti con sezionatore incorporato e interbloccati attraverso la rotazione della spina in modo che questa possa essere infilata o estratta solo a circuito aperto. Le prese FSCQ 363 sono fornite di fusibili di protezione.
**MATERIALI:** Corpo: in alluminio, dadi e le viti in acciaio inossidabile.
**FILETTATURA:** GAS EN 10226-2 (ISO 7/1) or NPT a richiesta
**VERNICIATURA STANDARD:** Epossidica colore grigio RAL 7037

*Explosion-proof receptacle with incorporated load switch. They are interlocked by the position of the plug in order that same can be inserted and taken off only when the circuit is open. The receptacle FSCQ 363 are fournished of fuses.*
***MATERIALS:** Body: light alloy casting, bolt and screws: stainless steel*
***THREADS:** GAS EN 10226-2 (ISO 7/1) or NPT on request.*
***STANDARD PAINTING:** Grey epoxy RAL 7037*

FSCQ 363

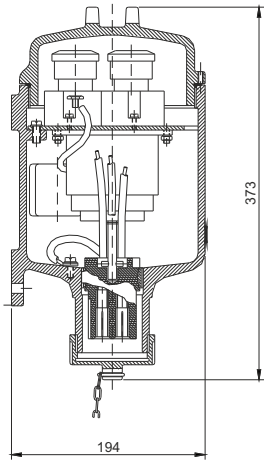


FSCQ 232 - 332

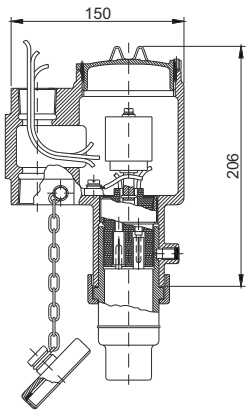

| Codice *Code* | N° di poli *Poles N°* | Carico - *Load* | | Ø imbocchi *Ø Holes* | Tipo di spina *Plugs type* | Peso Kg *Weight Kg* | Note *Notes* |
|---|---|---|---|---|---|---|---|
| | | Volt | Ampere | | | | |
| FSCQ232/.* | 2 + E | max 690* | 16/32 | 2 x 1" | FPA2 | 2,3 | Interruttore controllato con rotazione spina *Switch controlled by plug rotation* |
| FSCQ332/.* | 3 + E | max 690* | 16/32 | 2 x 1" | FPA3 | 2,3 | |
| FSCQ363/.* | 3 + E | max 690* | 63 | 2 x 1 ½" | FP363 | 8,5 | c.s. ma con interruttore e fusibili *As above but with switch and fuses* |

LEGENDA CODICI PER TENSIONE
**V(viola**)=20/25V, **W(bianco)**=40/50V, **G(giallo**)=100/130V,
**B(blu)**=200/250V, **R(rosso)**=380/460V, **N(nero)**=480/690V
Esempio per ordinare: FSCQ232/B (2x16/32A 200/250V)

VOLTAGE COLOURS
**V(violet)**=20/25V, **W(white)**=40/50V, **G(yellow**)=100/130V,
**B(blue**=200/250V, **R(red**)=380/460V, **N(black)**=480/690V
Example to order: FSCQ232/B (2x16/32A 200/250V)