

## PROIETTORI SERIE "RLEQ" PER GRUPPO I FLOODLIGHTS SERIES "RLEQ" FOR GROUP I

MODO DI PROTEZIONE - PROTECTION MODE:  
I M2 Ex d I 163°C-191°C (Amb.temperature -20°C to +40°C)

CERTIFICATO - CERTIFICATE: ATEX

I proiettori possono ospitare lampade: ai vapori di sodio e ioduri metallici con attacco E-40, sono realizzati in acciaio e composti da un corpo e un coperchio con vetro sigillato. Il coperchio è montato al corpo con 20 viti in acciaio inossidabile di qualità A2-70.

### GRADO DI PROTEZIONE:

I M2, EEx d I 163°C, IP 65 per lampada ai vapori di sodio da 250W e 400W  
I M2, EEx d I 191°C, IP 65 per lampada ioduri metallici da 400W

**PESO:** 92 Kg escluse le apparecchiature elettriche

**FILETTATURE:** GAS EN 10226-2 (ISO 7/1). Altre a richiesta

**VERNICIATURA:** su richiesta specificare il tipo di RAL.

*The Floodlight can be equipped with sodium vapour lamps and metal halide lamps with lamp holder E-40, It is made in steel and composed by: body assembled with cover, equipped with sealing glass.*

*The cover is assembled at the body by 20 stainless steel screws A2-70 quality.*

### PROTECTION DEGREE:


I M2, EEx d I 163°C, IP 65 for sodium vapour lamp 250W and 400W

I M2, EEx d I 191°C, IP 65 for metal halide lamp 400W

**WEIGHT:** 92 Kg without electrical equipment

**THREADS:** GAS EN 10226-2 (ISO 7/1). Other on request

**PAINTING:** On request specify type of RAL

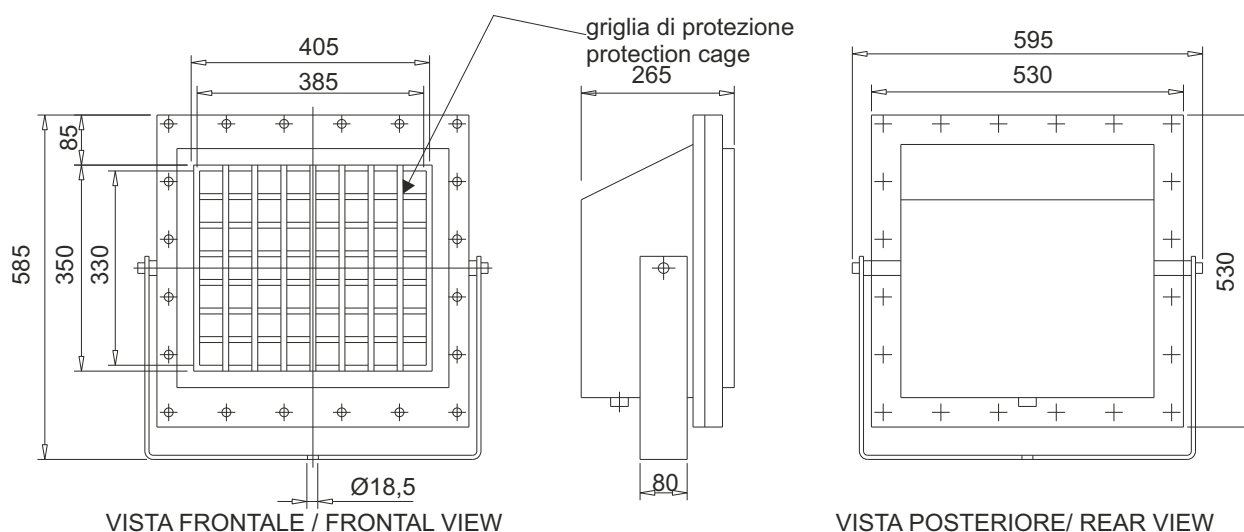

| Tipo per ordine<br>Type for order | Lampade - Lamps                  |                                  | Reattore<br>Ballast | Innesco<br>Ignitor |
|-----------------------------------|----------------------------------|----------------------------------|---------------------|--------------------|
|                                   | Vapori di sodio<br>Sodium vapour | Ioduri metallici<br>Metal halide |                     |                    |
| RLEQ-250NA                        | 250W-230V                        | -                                | 250W 230V           | 70/150/250/400W    |
| RLEQ-400NA                        | 400W-230V                        | -                                | 400W-230V           |                    |
| RLEQ-400JM                        | -                                | 400W-230V                        | 400W-230V           |                    |